


# MODEL: BSX155/BSX156 Technical Specifications

Task, Pneumatic, Weight Activite Tilt,  
Mesh Back, Height Adjustable Arms, Tilt  
Tension, Tilt Lock

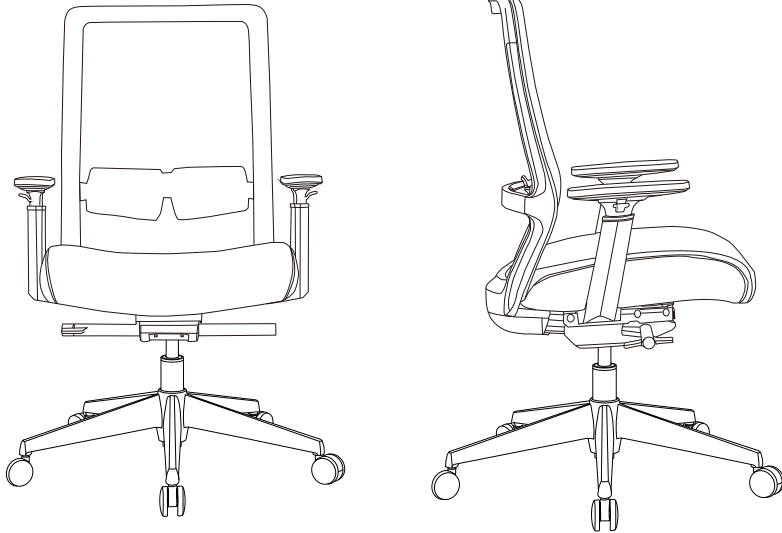

## KEY DIMENSIONS

Max. Width.....	29-1/8"
Max. Depth.....	27-7/8"
Max. Height.....	43-1/2"
Seat Size	
Width.....	20-7/8"
Depth.....	17-2/5"-18-3/4"
Height from Floor.....	20-3/8"-24-1/5"
Back Lumbar	
Height.....	9-1/4"

## Back Size

Width.....	18-1/2"
Height from Seat.....	24-1/4"
Arm Size	
Distance between arms.....	19-1/4"
Height from floor.....	25-1/2" - 32"
Height from seat.....	8-1/2"
Width.....	3-5/8"
Length.....	10"
Arm Set-Back.....	4"

## CONSTRUCTION

- Caster..... Black hooded 2.36" diameter dual wheel.
- Base..... Black 5 leg injection molded plastic.
- Control..... Black heavy gauge steel, weight activite tilt, 17-4 taper.
- Seat..... 4" thick, 9-ply plywood, 3-1/8" thick urethane foam cushion.
- Back..... Plastic injection molded.
- Upholstery..... See List Pricer.
- Arm..... Plastic injection molded, height adjustable.
- Chair Weight..... 37.5 pounds.
- Shipping Weight... 42.5 pounds.
- Shipped..... Assembly required.
- Shipping Size..... 28" wide x 13.8" deep x 26" high (5.9cubic feet). Shippable by small package carrier.
- Flammability
- Rating..... Furnished upon request by The HON Company Customer Service. Model BSX155/BSX156 meets the State of California Department of Consumer Affairs Technical Bulletin 117 requirements.
- Special Features.... A pneumatic gas cylinder is used for seating height adjustment of chair.
- Note..... All measurements are per BIFMA/CMD procedures.



HONBASYX.com